




# Scinor® SMT600-P72

## Pressurized Ultrafiltration Module

Scinor SMT600 series ultrafiltration modules utilizing our state-of-the-art Thermally Induced Phase Separation (TIPS) PVDF membranes provide the highest permeability, mechanical strength, and chemical tolerance in the industry. These modules are ideal for use in potable water, wastewater, desalination, and industrial applications. The SMT600-P72 retrofits major membrane vendor installations giving end-users a choice when replacing membranes.

The SMT600-P72 is an outside-in configuration module that operates in dead-end or cross-flow mode depending on specifics of the application. Cleaning processes used are simple backwash, maintenance clean, and Clean-in-Place.

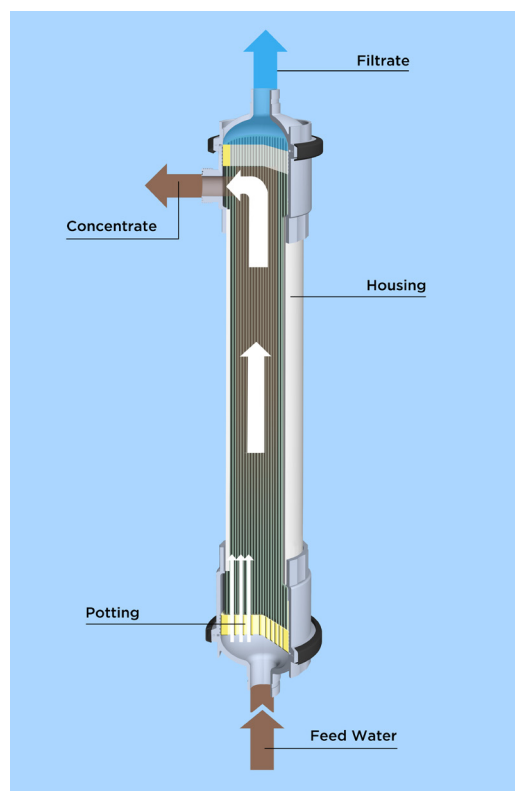

## Product Advantages

### Excellent Filtered Water Quality

- >3.5 log virus removal and >6 log crypto removal
- Low fiber breakage rate

### Long Operational Life

- High mechanical strength and durability
- >5000 mg/L Sodium Hypochlorite tolerance

### Low Capital Cost

- High flux rates on all water sources

### Low Requirements for Pretreatment

- Outside-in configuration
- Optimal flow channel

### Low Operating and Maintenance Requirements

- Low energy and chemical consumption due to higher permeability
- Automatic operation

Retrofit modules available for all major membrane suppliers

### Scinor Water America, LLC

40 Wall Street, 28<sup>th</sup> Floor  
New York, NY 10005  
800.774.1385


Please visit [scinor.com](http://scinor.com) for further information.



# Specifications

## Parameters

Scinor® Module	Part Number	SMT600-P72
	Fiber Material	Polyvinylidene Fluoride (PVDF)
	Effective Area	775 ft <sup>2</sup> (72 m <sup>2</sup> )
	Nominal Pore Size	0.1 µm
	Fiber ID/OD	0.7 mm/1.3 mm
	Geometry	Φ 200 mm × 2160 mm
	Port Size	JIS 80A, Side JIS 65A
	Housing/Head Material	U-PVC/ABS
	Potting Material	Epoxy Resin
Operating Parameters	Temperature	33-104° F (1-40 C)
	pH Range	1-13
	Max. NaClO	5000 mg/L
	Backwash Flux	30-70 gfd (50-120 l/mh)
	Air Scour Flow	3.1-7.5 scfm/module (5-12 Nm <sup>3</sup> /hr/module)
	Max. Feed Pressure	60 psi (0.4 MPa)
	Max. TMP	45 psi (0.3 MPa)
	Operating TMP	3-22 psi (0.02-0.15 MPa)
	Max. Air Scour Pressure	36 psi (0.25 MPa)
	Max. Backwash Pressure	36 psi (0.25 MPa)
Filtered Water Performance	Turbidity	≤0.1 ntu
	Silt Density Index	≤3
	E.Coli Removal	non-detect
	LRV, Virus	3.98
	LRV, Cryptosporidium	>6.0

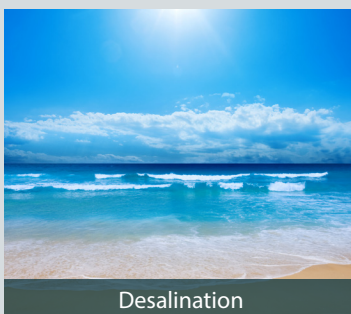

The information provided in this brochure contains general descriptions to illustrate product characteristics and parameters. Conditions and protocol may differ from one location to another and may change with time. Customer is responsible for determining whether products and the information in this document are appropriate for customer's use. Scinor assumes no obligation or liability for the information provided in this document.